ROEMER

HEMOROAM5X

The HemoRoam line of mobile, battery-powered refrigerators enables healthcare providers to store blood and plasma between 1°C to 6°C. By reducing medical waste and saving time, the HemoRoam allows healthcare providers to transition from outdated disposable coolers to innovative, cost-effective solutions for the modern day.



THE FEATURES YOU NEED


- **Outer case constructed with durable military-grade Aluminum (MIL-SPEC)**
- **Ergonomic spring handles automatically stow for safe shipping.**
- **Stackable outer case allows for efficient out-of-use storage.**
- **Integrated LiFePO4 BBS8 battery enables the unit to operate for 8 hours portably.**
- **Smart charge technology automatically switches charge between battery and electrical power plugs without the need for user intervention.**
- **Digital microprocessor temperature controller with built-in audible alarm .**
- **Watertight, sealed, an anodized payload compartment.**
- **Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB**
- **Pad lockable**

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Mobility options
- Temperature data logger

SPECIFICATIONS

OVERALL DIMENSIONS	15” X 11” X 13.5”
WEIGHT	28 lbs.
REFRIGERATED PAYLOAD DIMENSIONS	5.5” X 7” X 9”
REFRIGERATED PAYLOAD CAPACITY	8 units of 300ml RBC/ 300ml Plasma
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
TEMPERATURE UNIFORMITY	+/- 1° C AT SET POINT 4.0° C
POWER INPUTS	12-24 VDC 110-240 VAC

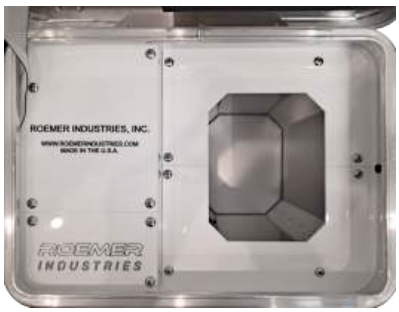



1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAM8

The HemoRoam line of mobile, battery-powered refrigerators enables healthcare providers to store blood between 1°C to 6°C and platelets at ambient temperatures. By reducing medical waste and saving time, the HemoRoam allows healthcare providers to transition from outdated disposable coolers to innovative, cost-effective solutions for the modern day.



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

INCLUDED ACCESSORIES

- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

SPECIFICATIONS

OVERALL DIMENSIONS	23" x 15.5" x 9.75
WEIGHT	42 LBS
REFRIGERATED PAYLOAD DIMENSIONS	9" X 8" X 5"
REFRIGERATED PAYLOAD CAPACITY	12 UNITS OF 300 ML RBC / 300 ML PLASMA
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
TEMPERATURE UNIFORMITY	+/- 0.5°C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC
BATTERY CAPACITY	BBS8 8-12 HOURS





1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAM15

The HemoRoam line of mobile, battery-powered refrigerators enables healthcare providers to store blood between 1°C to 6°C and platelets at ambient temperatures. By reducing medical waste and saving time, the HemoRoam allows healthcare providers to transition from outdated disposable coolers to innovative, cost-effective solutions for the modern day.



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

SPECIFICATIONS

OVERALL DIMENSIONS	24" X 18" X 28"
WEIGHT	80 LBS
REFRIGERATED PAYLOAD DIMENSIONS	9" X 8" X 10"
REFRIGERATED PAYLOAD CAPACITY	24 UNITS OF 300 ML RBC / 300 ML PLASMA
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
ROOM TEMPERATURE STORAGE DRAWER	10.5" X 7.75" X 3"
ROOM TEMPERATURE STORAGE CAPACITY	3 UNITS OF 300 ML PLATELET BAGS
TEMPERATURE UNIFORMITY	+/- 0.5°C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC

INCLUDED ACCESSORIES

- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

BATTERY CAPACITY

	NEW TOTAL WEIGHT	FRIDGE BATTERY LIFE	FREEZER BATTERY LIFE
BBS22	95 LBS	20-24 HRS	NA
BBS50	125 LBS	44-48 HRS	NA

1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAM25

The HemoRoam line of mobile, battery-powered refrigerators enables healthcare providers to store blood between 1°C to 6°C and platelets at ambient temperatures. By reducing medical waste and saving time, the HemoRoam allows healthcare providers to transition from outdated disposable coolers to innovative, cost-effective solutions for the modern day.



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

INCLUDED ACCESSORIES

- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

SPECIFICATIONS

OVERALL DIMENSIONS	23” X 15.7” X 23”
WEIGHT	70 LBS
REFRIGERATED PAYLOAD DIMENSIONS	17.5" x 9.5" x 9.5"
REFRIGERATED PAYLOAD CAPACITY	36 UNITS OF 300 ML RBC / 300 ML PLASMA
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
ROOM TEMPERATURE STORAGE DRAWERS	12” X 9.5” X 2.5” & 12” X 4.5” X 2.5”
ROOM TEMPERATURE STORAGE CAPACITY	3 UNITS OF 300 ML PLATELET BAGS
TEMPERATURE UNIFORMITY	+/- 0.5°C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC

BATTERY CAPACITY

	NEW TOTAL WEIGHT	FRIDGE BATTERY LIFE	FREEZER BATTERY LIFE
BBS22	82 LBS	20 HRS	NA
BBS50	115 LBS	40-48 HRS	NA
BBS100	145 LBS	80-96 HRS	NA

1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAM12X2

The Hemoroam12X2, battery-powered refrigerator enables healthcare providers to store blood products between 1°C to 6°C. Two independent cooling compartments, with dual compressor, allow for two different temperature settings. Ideal for storing RBC and freshly thawed plasma in the same mobile unit during MTP.



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

SPECIFICATIONS

OVERALL DIMENSIONS	24" x 18" x 28"
WEIGHT	130 LBS
REFRIGERATED PAYLOAD DIMENSIONS	TWO 9.5" X 8" x 10" Compartments
REFRIGERATED PAYLOAD CAPACITY	12 UNITS of 300ML RBC 12 UNITS of 300ML Plasma
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
TEMPERATURE UNIFORMITY	+/- 1.0° C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC

INCLUDED ACCESSORIES

- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

BATTERY CAPACITY

	FRIDGE BATTERY LIFE
BBS50	30 HRS



1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAM25X2

The HemoroamX2, battery-powered refrigerator enables healthcare providers to store blood products between 1°C to 6°C. Two independent cooling compartments allow for two different temperature settings. Ideal for storing RBC and freshly thawed plasma in the same mobile unit during MTP.



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

SPECIFICATIONS

OVERALL DIMENSIONS	33" X 23.25" x 30.5"
WEIGHT	180 LBS
REFRIGERATED PAYLOAD DIMENSIONS	TWO 10" X 15" x 10.75" Compartments
REFRIGERATED PAYLOAD CAPACITY	36 UNITS of 300ML RBC and 36 UNITS of 300ML Plasma
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
TEMPERATURE UNIFORMITY	+/- 1.0° C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC

INCLUDED ACCESSORIES


- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

BATTERY CAPACITY

	NEW TOTAL WEIGHT	FRIDGE BATTERY LIFE
BBS50	180 LBS	24 HRS
BBSI00	210 LBS	36-40 HRS

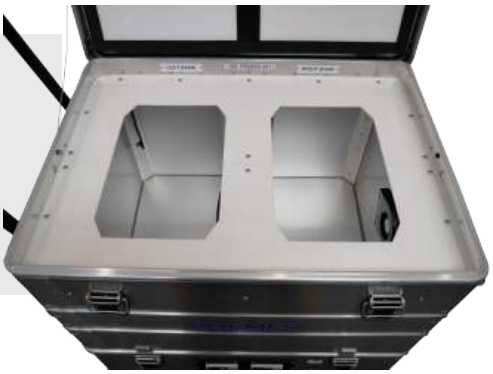

1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAM60

The HemoRoam line of mobile, battery-powered refrigerators enables healthcare providers to store blood between 1°C to 6°C and platelets at ambient temperatures. By reducing medical waste and saving time, the HemoRoam allows healthcare providers to transition from outdated disposable coolers to innovative, cost-effective solutions for the modern day



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

INCLUDED ACCESSORIES

- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

SPECIFICATIONS

OVERALL DIMENSIONS	31.75" X 23.25" X 24.75"
WEIGHT	120 LBS
REFRIGERATED PAYLOAD DIMENSIONS	22" X 14" X 10"
REFRIGERATED PAYLOAD CAPACITY	78 UNITS OF 300 ML RBC / 300 ML PLASMA
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
TEMPERATURE UNIFORMITY	+/- 1.0° C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC

BATTERY CAPACITY

	NEW TOTAL WEIGHT	FRIDGE BATTERY LIFE	FREEZER BATTERY LIFE
BBS50	165 LBS	36-40 HRS	NA
BBS100	195 LBS	80-96 HRS	NA
BBS200	265 LBS	160-196 HRS	NA

1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com

ROEMER

HEMOROAMI00

The HemoRoam line of mobile, battery-powered refrigerators enables healthcare providers to store blood between 1°C to 6°C and platelets at ambient temperatures. By reducing medical waste and saving time, the HemoRoam allows healthcare providers to transition from outdated disposable coolers to innovative, cost-effective solutions for the modern day



THE FEATURES YOU NEED

- Outer case constructed with durable military-grade Aluminum (MIL-STD-810, MIL-STD-461, ATA 300 (Cat. 1), DIN EN 60 529)
- Ergonomic spring handles automatically stow for safe shipping
- Stackable outer case allows for efficient out-of-use storage.
- Smart change technology automatically switches charge between battery and electrical power plugs without the need for user intervention
- Digital microprocessor temperature controller with built-in low battery alarm
- Watertight, sealed, and anodized payload compartment
- Complies with cold-chain protocols of VFC, FDA, CDC, AABB & AATB
- Pad lockable

INCLUDED ACCESSORIES

- Castor wheels
- Handle bar
- File folder

OPTIONAL ACCESSORIES

- Cigarette lighter adapter
- Temperature data logger

SPECIFICATIONS

OVERALL DIMENSIONS	31.75" X 23.25" X 33.25"
WEIGHT	135 LBS
REFRIGERATED PAYLOAD DIMENSIONS	22" X 14" X 18"
REFRIGERATED PAYLOAD CAPACITY	130 UNITS OF 300 ML RBC / 300 ML PLASMA
PROGRAMMABLE TEMPERATURE RANGE	REFRIGERATOR: 1°C - 6°C
TEMPERATURE UNIFORMITY	+/- 1.0° C AT SETPOINT 4.0° C
POWER INPUTS	12-24 VDC / 110-240 VAC

BATTERY CAPACITY

	NEW TOTAL WEIGHT	FRIDGE BATTERY LIFE	FREEZER BATTERY LIFE
BBS50	180 LBS	24-30 HRS	NA
BBSI00	210 LBS	48-60 HRS	NA
BBS200	280 LBS	96-120 HRS	NA

1770 Gillespie Way, Suite 111, El Cajon, CA 92020
Sales & Service 844-476-3637 | RoemerIndustries.com